

A modern, light-colored glass-walled booth, likely a telepresence or video conferencing room. The booth has a glass door with a white handle and a small green indicator light. Inside, there is a white desk with a black camera mounted on it, and a green cushioned stool. The background is a light blue wall.

# Calma

**nurus**

Adaptable Sizes  
or Any Workplace

# 6 Different Solutions

Internationally Recognized  
Certifications

15 +

Acoustic Attenuation Rate  
\*according to ISO 23351-1

# Class-A

Warranty  
After Installation

5 Years

Air Circulation within Pod  
\*Calma For U

# 106 times / hour

Happy Clients

> 4.000





Calma

# Product Family

8

## CALMA SMALL

Small Pod  
Great Function



8

## CALMA FOR U

Best Video  
Conference Hub



88

## CALMA MEDIUM

The Perfect  
One-on-One



8888

## CALMA LARGE

Creative  
Collaboration Space



8888

## CALMA XLARGE

Strategic  
Meeting Space



888888


## CALMA XXLARGE

Gather, Discuss  
Innovate



**Calma Small**  
100x110x224 cm

- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Optional desktop electrification system
- Optional fixed or height-adjustable HDF powder coated desk



**Calma For U**  
100x140x224 cm



- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Optional Medio Wall and face lights
- Optional horizontal sliding HDF powder coated desk at fixed height



**Calma Medium**  
100x220x224 cm

- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Integrated Nurus Links set
- Optional TV bracket, HDF powder coated fixed table and soft seating for two people



**Calma Large**  
144x220x224 cm

- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Integrated Nurus Links set
- Optional TV bracket, HDF powder coated fixed table and soft seating for up to four people



**Calma XLarge**  
188x220x224 cm

- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Integrated Nurus Links set
- Optional TV bracket, HDF powder coated fixed meeting table



**Calma XXLARGE**  
276x220x224 cm

- Adjustable lighting & ventilation system with touch panel
- 12 mm thick single-piece glass door
- Occupancy sensor option
- Castors and adjustable leveling feet
- Integrated Nurus Links set
- Optional TV bracket, HDF powder coated fixed meeting table

# Reduced Noise, Improved Concentration

Being exposed to sound pollution can cause stress related cardiovascular disorders. A quick escape from noise, Calma creates the perfect spot with **Class A Soundproofing, certified by ISO 23351-1.**

The perfect voice clarity is developed with the engineered acoustic layering of Calma; reaching **0,30 sec of reverberation time.** Constantly tested and re-developed within the in-house **Acoustic Lab**; materials used to create Calma sets the new standards in the industry. Unlike others; Calma ensures a balanced blockage of **both low and high-frequency sounds.**





# We Care About the Air You Breathe



# Air Flow

## Air Flow within the cabinet

The air exchange rate reflects how frequently the cabin experiences complete air changes. This rate is expressed as the number of air exchanges per hour. According to the data, the cabin is ventilated at a rate of 85 air units/hour. This value is pivotal in understanding how often the cabin's indoor air is replaced by fresh air, which is vital for maintaining indoor air quality. The air inlet area is a crucial factor in achieving effective cabin ventilation and enhanced indoor air quality. A larger air inlet area could indicate the need for a higher air exchange rate, ensuring consistent renewal of indoor air and the provision of fresh air.



Air Exchange Period  
Every

**42** seconds

Air Inflow

**144,7** m³/h



\*These figures are based on evaluating the Calma Small and For U's ability to uphold indoor air quality and circulation. It's worth noting that these results specify when the ventilation fans operate at 100% capacity.





## Reducing Stress is More Important Than Ever

Have you been experiencing visual strain lately?

Long hours of exposure to light can cause **chronic headaches** and distractions.

Calma uses the closest possible light temperature and brightness to **daylight (2700K)**. Daylight-mimicking amplifies the pod's affects on your well-being; aligning closer with **circadian rhythms** and preferences.

Engineered and carefully calculated lighting distribution ensures that everyone in the meeting has **enough light to work** and look their best during long hours of meetings or focus group work.



Healthy & Sustainable

# We Know Our Impact

Calma exemplifies commitment to environmental sustainability through its efficient, innovative manufacturing processes and use of eco-friendly materials. Manufactured within a **95% vertically integrated facility**, the **circular production system minimizes Scope 3 Carbon emissions**. Calma pods are crafted using a **zero-waste, HDF powder coating process**, which eliminates any VOC (organic and inorganic) emissions and results in a fine-grained, antibacterial surface that is easy to clean and maintain.

This process also uses **lower heat (130-140°C) for curing a thermoset, durable surface**, reducing energy consumption compared to traditional methods. The product’s structure incorporates responsibly sourced materials, including **FSC certified wood and 50% recycled PET felt**. Calma holds multiple certifications, including Indoor Air Quality Gold, supported using **Basotect G+ layers** instead of conventional stone-wool insulations, enhancing both acoustic performance and environmental sustainability. By integrating sustainable manufacturing techniques, renewable energy sources, and recyclable components, Calma sets a new standard for sustainable workplace solutions. It not only meets but exceeds current environmental standards, making it an excellent choice for organizations committed to sustainability. Calma holds an **Environmental Product Declaration (EPD)** certification, which objectively analyzes and evaluates its environmental impacts. Prepared in accordance with ISO 14025 and ISO 15804 standards, this declaration serves as a document that scientifically and comprehensively analyzes the environmental impacts of the product throughout its life cycle.

# Sustainable & Zero VOC HDF Powdercoating

|  |   |   |
|--|---|---|
| <br>Durable                       | <br>Easy to Clean            | <br>Odorless                   |
| <br>Moisture Resistant           | <br>Low Risk of Fire Hazard | <br>100% Healthy Eco-Friendly |
| <br>Anti-Allergic Antibacterial | <br>Non-Toxic              | <br>0% Paint Waste           |

# Calma Small

## Product Features

### Occupancy Indicators Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### Height Adjustable or Fixed Desk


*(Optional)*  
HDF powder coated with matte, textured finish, height adjustable (68 to 118 cm) or at fixed height (96 cm)  
Max. weight carried: 50 kgs  
Spiral cable extension: 500mm, GST 18 outlet connection

### Laminated Glass

5+5mm acoustic laminated glass on the back, low freq. vibration absorber

### Air Ventilation

2 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

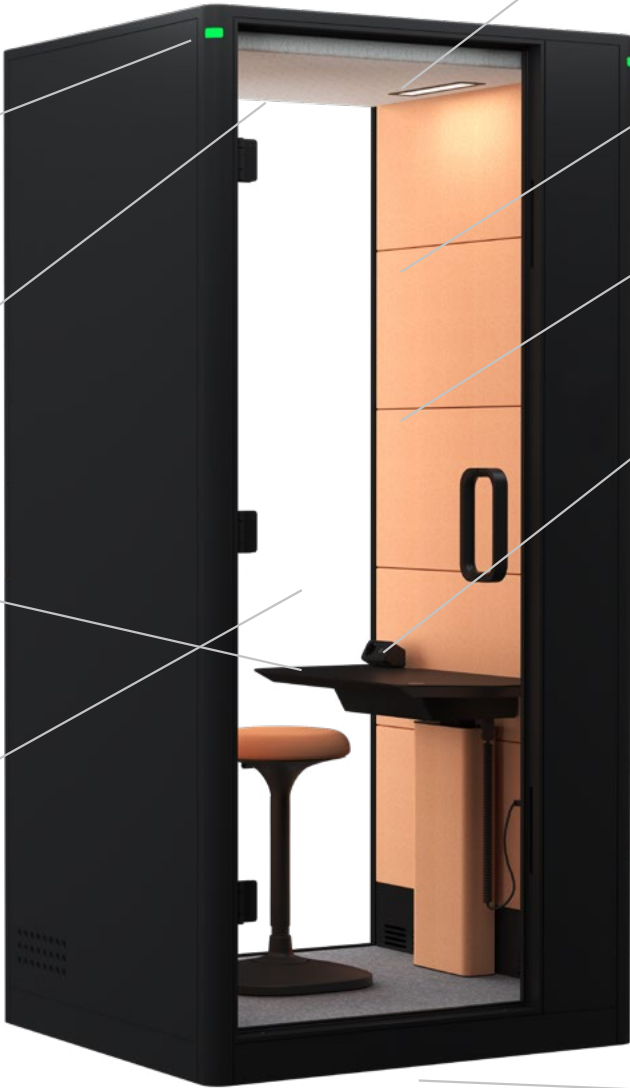

### Dimmeable LED Lights

| STANDARD  | FOR USA   |
|---|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED)<br>168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

### Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free, low risk of fire hazard

### Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### Desktop Outlet

*(Optional)*  
Standard black plastic with powder coated aluminium frame  
1 unit Biticino outlet  
1 unit USB A+C Type  
1 unit 3000 mm RJ45 Ethernet Type Data cable can be mounted on the ceiling or the floor as well

### Main Power Unit

| STANDARD  | FOR USA  |
|---|--|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 32 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 32 Watts |

### Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Gravity Stool placed within Calma Small is an optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links



Ventilation Fans



# Calma For U

## Product Features

### Occupancy Indicators Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### Laminated Glass

5+5mm acoustic laminated glass on the back, low freq. vibration absorber

### Air Ventilation

2 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom



### Dimmeable LED Lights

| STANDARD  | FOR USA   |
|---|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED)<br>168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

### Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### Media Wall & Integrated Facelights

*(Optional)*

### Depth Adjustable Desk

*(Optional)*  
HDF powder coated with matte, textured finish, depth adjustable (16 cm retractable) at fixed height (74 cm)  
Max. weight carried: 50 kgs  
Spiral cable extention: 500mm, GST 18 outlet connection

### Main Power Unit

| STANDARD  | FOR USA  |
|---|--|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 45 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 45 Watts |

### Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



Touch Screen Panel



Magnetic Door



Media Wall  
Please see electrical specifications page for detailed information



Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Mou office chair placed within Calma For U is an optional furniture.

# Calma Medium

## Product Features

**Occupancy Indicators**  
Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

**Sound Absorbent**  
Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

**Tempered Glass Door**

12mm single piece tempered glass with 180° opening angle

**Laminated Glass**

5+5mm acoustic laminated glass on the back, low freq. vibration absorber

**Air Ventilation**

4 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

**Dimmeable LED Lights**

| STANDARD  | FOR USA   |
|---|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED)<br>168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

**Basotect G+ Layering**

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

**TV Bracket**

*(Optional)*  
Compatible with screens up to 27 inches

**Nurus Links**

*(Optional)*

**Meeting Table**

*(Optional)*  
500x700mm desk for two people, height 74 cm

**Main Power Unit**

| STANDARD  | FOR USA  |
|---|--|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 54 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 54 Watts |

**Seismic Footplates & Castors**

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

Touch Screen Panel

Magnetic Door

Nurus Links  
Please see electrical specifications page for detailed information

Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Alava office chair placed within Calma Medium is an optional furniture.

18

Calma

nurus

19

Calma



# Calma Large

## Product Features

### Occupancy Indicators Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### TV Bracket

*(Optional)*  
Compatible with screens up to 32 inches

### Nurus Links

*(Optional)*

### Laminated Glass

5+5mm acoustic laminated glass, low frequency vibration absorber

### Air Ventilation

6 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

### Dimmeable LED Lights

| STANDARD  | FOR USA   |
|---|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED)<br>168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

### Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### Meeting Desk & Soft Seating

*(Optional)*  
680x900mm desk for up to four people, height 74 cm  
Built-in Soft Seating with cushions and padded seat

### Main Power Unit

| STANDARD  | FOR USA  |
|---|--|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 94 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 94 Watts |

### Seismic Footplates & Castors

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



Touch Screen Panel



Magnetic Door



Nurus Links

Please see electrical specifications page for detailed information



Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.

# Calma XLarge

## Product Features

### Occupancy Indicators Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

### Sound Absorbent Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

### TV Bracket

*(Optional)*  
Compatible with screens up to 32 inches

### Nurus Links

*(Optional)*

### Laminated Glass

5+5mm acoustic laminated glass, low frequency vibration absorber

### Air Ventilation

8 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

### Dimmeable LED Lights

| STANDARD   | FOR USA   |
|--|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED) 168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

### Tempered Glass Door

12mm single piece tempered glass with 180° opening angle

### Basotect G+ Layering

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

### Meeting Desk

*(Optional)*  
Full length 680x1200 mm desk for up to four people, height 74 cm

### Main Power Unit

| STANDARD   | FOR USA   |
|--|---|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 100 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 100 Watts |

### Seismic Footplates

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



Touch Screen Panel



Magnetic Door



Nurus Links

Please see electrical specifications page for detailed information



Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Uneo office chairs placed within Calma XLarge are optional furniture.



# Calma XXLarge

## Product Features

**Occupancy Indicators**  
Activated by PIR Sensors

*(Optional)*  
Lights will turn red while in use or for the duration of reserved meetings  
Lights will turn green again after use within 1 minute

**Sound Absorbent**  
Recycled Felt Layering

Antibacterial, Anti-Allergic  
Oil and water repellent, easy to clean  
50% recycled PET  
Fire Rates: B,S1, d0 (EN-13501)

**TV Bracket**

*(Optional)*  
Compatible with screens up to 32 inches

**Nurus Links**

*(Optional)*

**Laminated Glass**

5+5mm acoustic laminated glass, low frequency vibration absorber

**Air Ventilation**

12 pcs. Noctua IPPC2000 Fan Module  
Airflow per fan 182,5 m³/h  
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

**Dimmeable LED Lights**

| STANDARD  | FOR USA   |
|---|---|
| Osram Dimmer LED's<br>6,2W (per 1 pc LED)<br>168 lm/W<br>2700K Daylight Hue<br>Min 20 - Max 170 Lux | Osram Dimmer LED's<br>12,6W (per 1 pc LED)<br>143,3 lm/W<br>2700K Daylight Hue<br>- |

**Tempered Glass Door**

12mm single piece tempered glass with 180° opening angle

**Basotect G+ Layering**

Located within walls of Calma, below fabric layers  
High sound absorption capacity  
VOC and mineral wool free  
Low Risk of Fire Hazard

**Meeting Desk**

*(Optional)*  
Full length 680x2000 mm desk for up to four people, height 74 cm

**Main Power Unit**

| STANDARD   | FOR USA   |
|--|---|
| 3000 mm input cable 220V-230V<br>EUR Plug Type<br>3800mm input cable 220V-230V<br>UK Plug or Multinational plug is available<br>4A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>back bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 148 Watts | US 5-15 P to IEC C13 power cord<br>10 ft length (100-120 VAC)<br>-<br>-<br>-<br>8A Fuse<br>Standard Black Colour<br>Main power unit is placed on the <b>bottom right corner</b> of Calma when faced up front<br>Operating at full power, total power consumption: 148 Watts |

**Seismic Footplates**

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

Touch Screen Panel

Magnetic Door

Nurus Links







Please see electrical specifications page for detailed information

Ventilation Fans

\*Lux measurement standards are based on values from table top surfaces.  
\*\*Alava office chairs placed within Calma XLarge are optional furniture.

# Technical Specifications



|                   |                               | Calma Small   | Calma For U   | Calma Medium  | Calma Large   | Calma XLarge  | Calma XXLarge   |
|-------------------|-------------------------------|---|---|---|---|---|---|
|                   |                               |  |  |  |  |  |  |
| Dimensions        | Exterior                      | 100x110x224 cm  | 100x140x224 cm  | 100x220x224 cm  | 144x220x224 cm  | 188x220x224 cm  | 276x220x224 cm  |
|                   | Interior                      | 89,6x93x204,8 cm  | 89,6x123x204,8 cm   | 89,6x205x204,8 cm   | 133,6x205x204,8 cm  | 177,6x205x204,8 cm  | 265,6x205x204,8 cm  |
| Mobility          |                               | Yes<br>1 person   | Yes<br>1 person   | Yes<br>1 person   | Yes<br>2 people   | -   | -   |
|                   | Cushioned Soft Seating Option | -   | Optional  | Optional  | Standard  | -   | -   |
| Max User Capacity |                               | 1 person  | 1 person  | 2 people  | 4 people  | 4 people  | 6 people  |
| Air Fans          |                               | 2 pcs   | 2 pcs   | 4 pcs   | 6 pcs   | 8 pcs   | 12 pcs  |
| Castors           | Castors                       | 4 pcs   | 4 pcs   | 4 pcs   | 4 pcs   | -   | -   |
|                   | Fixed Feet                    | 4 pcs   | 5 pcs   | 8 pcs   | 8 pcs   | 16 pcs  | 24 pcs  |
| Table             |                               | Optional<br>370x820mm<br>h: 960mm   | Optional<br>432x880mm<br>h: 740mm   | Optional<br>500x700mm<br>h: 740mm   | Optional<br>680x900mm<br>h: 740mm   | Optional<br>680x1200mm<br>h: 740mm  | Optional<br>680x2000mm<br>h: 740mm  |







Calma Small's height adjustable table can move from 68 to 118 cm or can be placed at fixed height: 96 cm.  
Calma For U's retractable table can change its depth up to 16 cm at fixed 74 cm height.



# Electrical Specifications



\*Please refer to page 32 for detailed information about Nurus Links sets and Media Wall integration.

|                         | Calma Small   | Calma For U   | Calma Medium  | Calma Large   | Calma XLarge  | Calma XXLarge   |
|-------------------------|---|---|---|---|---|---|
|                         |  |  |  |  |  |  |
| Total Power Consumption | 32 W  | 32 W<br>45 W with Media Wall  | 54 W  | 94 W  | 100 W   | 148 W   |
| Power Outlet            | Optional Desktop Outlet   | Within Nurus Links*<br>(3 pcs with Media Wall)                                      | Within Nurus Links<br>(2 pcs)   | Within Nurus Links<br>(2 pcs)   | Within Nurus Links<br>(2 pcs)   | Within Nurus Links<br>(2 pcs)   |
| RJ45 Ethernet Entry     | Placed Under the Table  | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  |
| HDMI                    | -   | -   | Optional with TV Bracket<br>(1 pc)  | Optional with TV Bracket<br>(1 pc)  | Optional with TV Bracket<br>(1 pc)  | Optional with TV Bracket<br>(1 pc)  |
| Media Wall*             | -   | Yes<br>(Compatible with screens up to 27 inches)*                                   | -   | -   | -   | -   |
| TV Bracket              | -   | Yes<br>(with Media Wall)*   | Optional<br>(Compatible with screens up to 32 inches)                               | Optional<br>(Compatible with screens up to 32 inches)                               | Optional<br>(Compatible with screens up to 32 inches)                               | Optional<br>(Compatible with screens up to 32 inches)                               |
| USB A + C               | Optional<br>(with Media Wall)   | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  | Within Nurus Links  |

The RJ45 Ethernet Data Cable can be used from the floor or the ceiling of the product.  
Power outlets can be selected as European, Swiss (only available for DACH region), UK or Multinational types.  
Recommended screen size stated here are based on considering a healthy viewer distance. TV screens are not included in Calma products and must be bought separately.  
If the optional TV bracket is selected, a cable path for HDMI entry and an additional outlet for the TV plug is also integrated.

Calma

# Built-in Touch Screen



Controls for all Calma models except Calma For U.



Controls for Calma For U (facelight dimmer included)

The touch screen panel placed on the interior walls of Calma pods allow you to control fan speed and light dimmers.


If selected, The QR code placed on the touch screen controls of Calma can be scanned to access Calma's Digital Reservation System, by Web Browser or Mobile IOS App.









Calma Small



TOUCH PANEL DIMMER  
(FANS & LIGHT)  
MULTINATIONAL OUTLET  
USB A+C CHARGER  
RJ45 DATA CONNECTOR



Calma For U




TOUCH PANEL DIMMER  
(FANS & FACELIGHTS & LIGHT)  
MULTINATIONAL OUTLET  
USB A+C CHARGER  
RJ45 DATA CONNECTOR

\*NurusLinks combination for Media Wall option is shown on the right page




Calma Medium



TOUCH PANEL DIMMER  
(FANS & LIGHT)  
MULTINATIONAL OUTLET X2  
USB A+C CHARGER  
RJ45 DATA CONNECTOR




Calma Large



TOUCH PANEL DIMMER  
(FANS & LIGHT)  
MULTINATIONAL OUTLET X2  
USB A+C CHARGER  
RJ45 DATA CONNECTOR




Calma XLarge



TOUCH PANEL DIMMER  
(FANS & LIGHT)  
MULTINATIONAL OUTLET X2  
USB A+C CHARGER  
RJ45 DATA CONNECTOR



Calma XXL Large



TOUCH PANEL DIMMER  
(FANS & LIGHT)  
MULTINATIONAL OUTLET X2  
USB A+C CHARGER  
RJ45 DATA CONNECTOR

Media Wall is an optional integration,  
only available for Calma For U.

- A standard Nurus Links attached to the media wall includes:
- 1 pc 220 VAC power outlet (Max Output Power 500W)
- 1 pc USB A+C
- 2 pcs of dimmeable facelights for optimised digital communication, controlled by the integrated touch panel of Calma For U.

Behind the screen there are two  
standard connections

- 1 pc 220 VAC power outlet (for mounting screen or TVs)
- 1 pc RJ45 Ethernet Type Data


\*Please note that TV, Screen or monitors **ARE NOT** included nor attached to the media wall unit.

Maximum 27 inches screens can be mounted on the Media Wall unit.

The electrification unit shown on the visual is USA Type.



\*When TV Bracket option for Calma Large models is selected, the USB-C module placed on Nurus Links will be replaced with an HDMI outlet instead. Also 1 outlet for TV and 1 HDMI cable tunnel will be added on the panel for TV integration. For USA type Calma models, power outlets are US NEMA 5-15 receptacle.

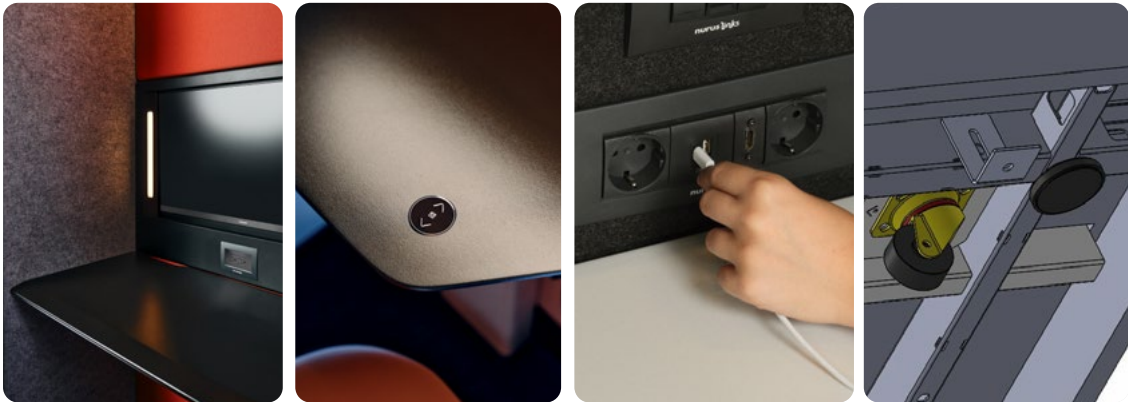

Media Wall      Height Adjustable Table      Nurus Links      Seismic Foot Plates


Calma

# Additional Information

**Nurus Links®**  
The integration of design and engineering.  
Nurus Links® system provides an easy to use integration of your electronic devices with your furniture.


A Nurus Links set for Calma includes:

| STANDARD   | FOR USA   |
|--|---|
| <ul style="list-style-type: none"><li>- 1 pc RJ45 Ethernet Data Entry (with sliding cover)</li><li>- 2 pcs 220VAC Power Outlet (Max Output Power 500W)</li><li>- 1 pc USB A+C 15W</li><li>- 1 pc touch screen (7 inches, vertical) to control fan and light power, dim, turn on and off.</li></ul>                               | <ul style="list-style-type: none"><li>- 1 pc RJ45 Ethernet Data Entry (with sliding cover)</li><li>- 2 pcs 100-220VAC Power Outlet (Max Output Power 750W)</li><li>- 1 pc USB A+C 15W</li><li>- 1 pc touch screen (7 inches, vertical) to control fan and light power, dim, turn on and off.</li></ul>                          |
| <p>Additional components stated below are included in case of TV Bracket inclusion:</p> <ul style="list-style-type: none"><li>- 1 pc HDMI Entry ( with HDMI integration one piece of USB C is removed)</li><li>- 1 pc extra power outlet added connecting the screen (multinational, UK, Swiss or EUR types available)</li></ul> | <p>Additional components stated below are included in case of TV Bracket inclusion:</p> <ul style="list-style-type: none"><li>- 1 pc HDMI Entry ( with HDMI integration one piece of USB C is removed)</li><li>- 1 pc extra power outlet added connecting the screen</li></ul> <p>Power outlet type US NEMA 5-15 receptacle</p> |

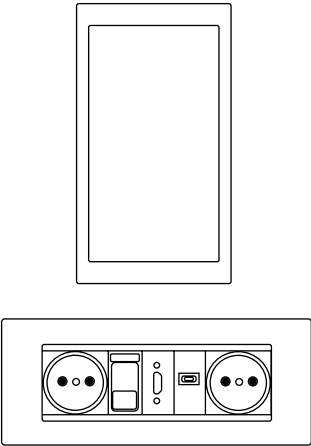


Calma

# Optional Components



**Desktop Power Outlet**  
This outlet is available for Calma Small only.

| STANDARD  | FOR US  |
|---|---|
| <ul style="list-style-type: none"><li>- 1 pc 220VAC Power Outlet (Max Output Power 500W)</li><li>- 1 pc USB A+C 15W</li><li>- Desktop power outlet can be mounted with brackets or attached on the table.</li></ul> | <ul style="list-style-type: none"><li>- 1 pc 220VAC Power Outlet (Max Output Power 750W)</li><li>- 1 pc USB A+C 15W</li><li>- Desktop power outlet can be mounted with brackets or attached on the table.</li></ul> |




**TV Bracket**  
This component is available for Calma Models of 220 cm and above width only. We recommend placing a 27 inch TV inside Calma, and maximum 32 inch TV can be mounted.



Sprinkler

**Sprinklers**  
Holes for sprinklers can be opened upon request. The package does not include the fixtures, only the holes can be drilled.



Reservation Screen
















**Reservation Screen**  
The reservation screen is an optional feature to be added on request to Calma For U. Simply scan the QR code, enter the web or mobile IOS app to access the instant / planned reservation system for all Calma models.



Calma

# Packaging Specifications




|                               |          | Calma Small   | Calma For U   | Calma Medium  | Calma Large   | Calma XLarge  | Calma XXLarge   |
|-------------------------------|----------|---|---|---|---|---|---|
|                               |          |  |    |    |    |  |  |
| Dimensions                    | Exterior | 100x110x224 cm  | 100x140x224 cm  | 100x220x224 cm  | 144x220x224 cm  | 188x220x224 cm  | 276x220x224 cm  |
|                               |          |  |    |    |    |  |  |
| Packaging                     |          | 68x123x228cm  | 68x123x228cm  | TBC   | TBC   | TBC   | TBC   |
| Packaging Type                |          | 1 Cardboard Crate   | 1 Cardboard Crate   | 1 Wooden Crate + 1 Box  | 1 Wooden Crate + 1 Box  | 2 Wooden Crates + 1 Box   | 2 Wooden Crates + 1 Box   |
| Weight                        |          | 390 kgs   | 440 kgs   | ≈600 kgs  | ≈720 kgs  | ≈900 kgs  | ≈1000 kgs   |
| Estimated Installation Time*  |          | 2 people<br>25 mins   | 2 people<br>20 mins   | 2 people<br>30 mins   | 4 people<br>30 mins   | 4 people<br>70 mins   | 4 people<br>110 mins  |
|                               |          | -   |  |  |  | -   | -   |
| Soft Seating Addition Package |          |   | 30 kgs<br>90x70x100 cm  | 60 kgs<br>90x140x100 cm   | 60 kgs<br>90x140x100 cm   |   |   |

\*These installation times might last approximately 30-40 mins longer according to circumstances of the space and number of selected optional features of your product.


# Analysis & Reports

\*Please contact your Nurus representative for detailed information about lab tests and analyze reports of Calma products since measurements are updated periodically for each product.

CO<sub>2</sub> Levels

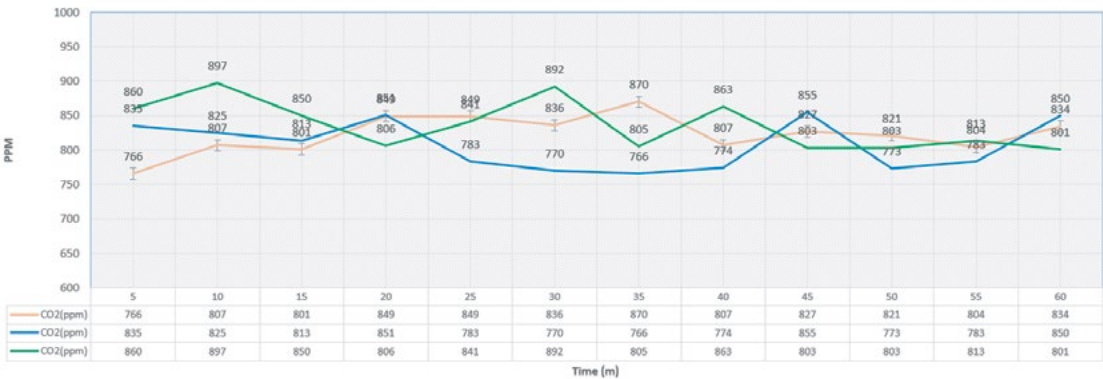

Humidity (%)

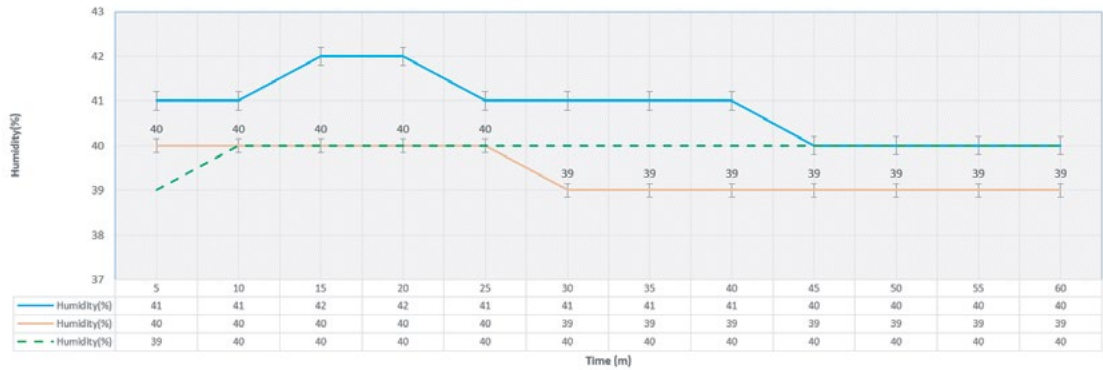

Temperature





# Materials



# Calma Materials




- 1 Upholstered Side Walls
- 2 HDF Powder Coated Exterior Walls and Built-in Furniture
- 3 %50 Recycled PET Felt Ceiling and Back Wall

## Carpet Options



## Felt Options



## HDF Powder Coating Finishes




## Upholstery - Blazer



## Upholstery - Rivet



## Upholstery - Era

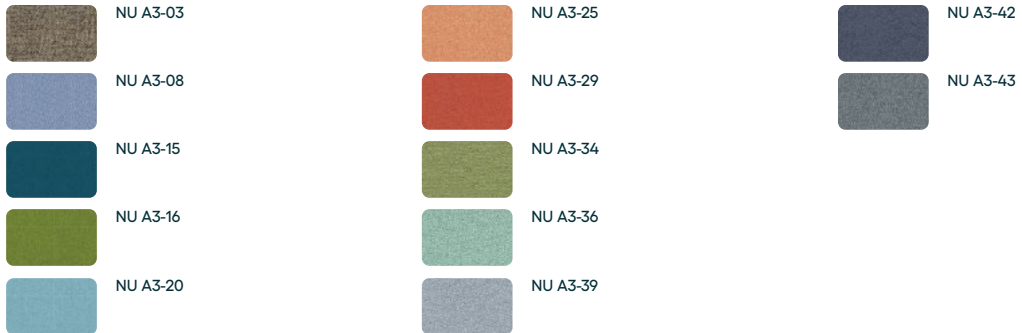














# Upholstery & Recommendations


Fabric Specifications

| ERA  | BLAZER  | RIVET   |
|--|---|---|
| <div></div>   | <div></div>  | <div></div>   |
| <b>100% Polyester</b>  | <b>100% Virgin Wool</b>   | <b>100% Post Consumer Recycled Polyester</b>  |
| Weight: 320 g/m2 ±5%<br>Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)<br>Light Fastness: 5 (ISO 105 - B02)   | Weight: 460 g/m2 ±5%<br>Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)<br>Light Fastness: 4-6 (ISO 105 - B02)  | Weight: 280 g/m2 ±5%<br>Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)<br>Light Fastness: 5-6 (ISO 105 - B02)  |
| Flammability<br>BS 7176 Low Hazard<br>EN 1021 - 1&2 (cigarette & match)<br>EN 13501-1 Adhered Class B, s1, d0<br>EN 13501-1 Un-adhered Class C, s1, d0<br>BS 7176 Medium Hazard with EnviroFlam5<br>BS 5852 Ignition Source 5 with EnviroFlam5<br>The Furniture & Furnishing (Fire Safety) Regulations 1988 (UK domestic cig & match) with EnviroFlam5 | Flammability<br>EN 1021 - 1&2 (cigarette & match)<br>BS 7176 Low Hazard<br>NF D 60-013<br>ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m3 Foam)<br>UNI 9175 Classe 1 IM<br>BS 476 Part 7 Class 1 (Adhered)<br>EN 13501-1 Adhered Class D, s1, d0<br>IMO FTP Code (Part 8)<br>The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match)<br>BS 5852 Ignition Source 5 when FR treated<br>BS 7176 Medium Hazard when FR treated<br>BS 476 Part 6 Class 0 when FR treated (Adhered)<br>EN 13501-1 Adhered Class B, s1, d0 when FR treated<br>EN 13501-1 Un-adhered Class D, s2, d0 when FR treated<br>BS 5867-2 Type B Curtains & Drapes when FR treated<br>EN 13773 Class 1 (when FR treated) | Flammability<br>EN 1021 - 1&2 (cigarette & match)<br>BS 7176 Low Hazard<br>UNI 9175 Classe 1 IM<br>EN 13501-1 Adhered Class B, s2, d0<br>EN 13501-1 Un-adhered Class B, s1, d0<br>Optional: Please specify when ordering:<br>BS 5852 Ignition Source 5 when treated with EnviroFlam5<br>BS 7176 Medium Hazard when treated with EnviroFlam5<br>The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) with EnviroFlam5<br>DIN 4102 B1 with FR Treatment (Gorts)<br>BS 5867-2: Type B Curtains & Drapes with FR Treatment (Gorts)<br>EN 13773 Class 1 with FR Treatment (Gorts) |


## Recommendations

For a better experience and successful use of the product, please make sure to keep in mind our recommendations and guides when using, installing or moving Calma.

- Do not plug and appliances more than 220-230 VAC.
  - Make sure that Calma is not plugged before you open the access cover on top.
  - The ventilation and lights work at the same time, make sure the lights are on when you are in the pod.
  - Do not block the vent grill, keep 20 cm distances between Calma products and walls.
  - Do not smoke inside.
- To have better access to air, we also recommend having at least 20 cm space distance between the ceiling and pod.
  - Keep the door closed at all times.
  - Keep fire sources away from Calma at all times.
  - **Do not install high power-consuming devices such as heaters or vacuum cleaners inside Calma.**
  - The maximum power outlet capacity is 500W for standard Calma and 750 W for USA Types.

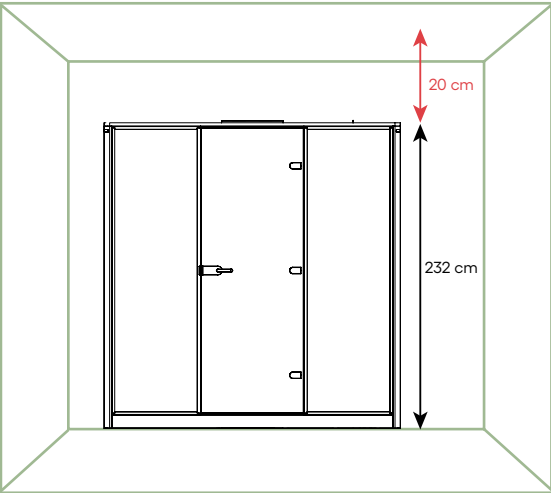

\*Please make sure to have some space between Calma products and their surroundings for healthy air circulation and use. The minimum recommended space requirement for the total height of Calma models is 252 cm.

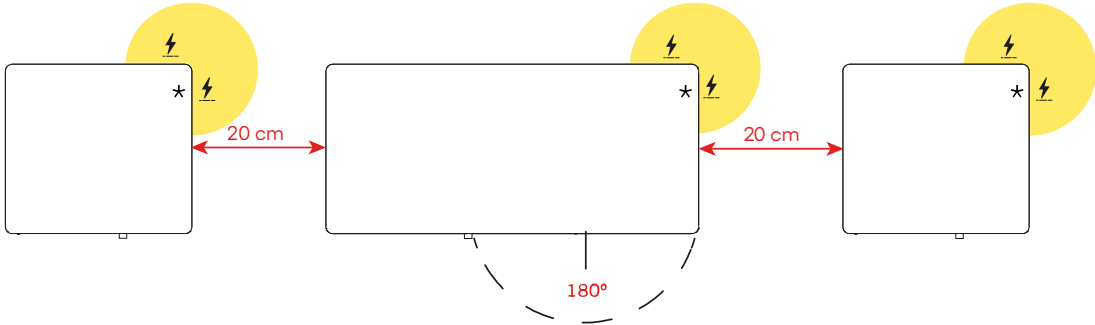

**When placing Calma units, make sure the bottom right corner of the back panel is close to a power source.**  
\* USA Type Calma products only has one power entrance on the bottom right corner of the **right panel**. For the standard types, the bottom right corner of the **back panel** can also be used.

